




ASP1602LC

Ladder with Safety Cage

Specification Sheet

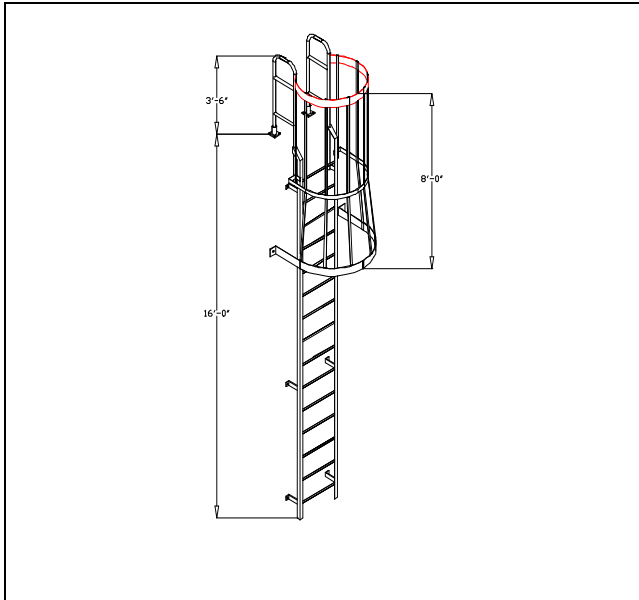

ASP1602LC – Ladder with Safety Cage – Is designed to be used where a fixed ladder with a walk-thru guardrail is required. Ladder is designed for use where heights require a safety cage for protection. Designed to bolt directly to any ASP Elevated Platform or to structures where fixed ladder is required.



Materials

Frame: 2-1/2" X 3/8" Flat Bar; 3/4" Rungs set on 12" centers; ASTM 572, grade 50; welded, hot-dip galvanizing after fabrication.

Hardware: Mounting brackets; 1/2" X 1-1/2" Bolts and 1/2" Nuts and washers available in Hot-Dip Galvanized finish.

Installation:

- A. Verify that roof surface is smooth and clean to extent needed to receive materials.
- B. Review approved final drawings to determine the locations of Ladder.
- C. Clean surfaces to receive Ladder removing any loose gravel and any foreign matter before setting Ladder.
- D. Accurately locate and align pre-fabricated Ladder in location specified as per approved shop drawings or as required herein and by site conditions.
- E. Attach Ladder by inserting bolts into mounting brackets as shown on approved shop drawings.
- F. Repeat until all bolts, nuts and washers supplied are installed in accordance with approved shop drawings.
- G. Attach Safety Cage in accordance with manufacturer's approved shop drawings using all bolts, nuts and washers supplied.
- H. Remove any unused materials and packaging from job site.

This print/image and design and detail shown hereon is the property of Advanced Support Products, Inc. This print is furnished with the understanding that it is not to be reproduced without permission, and must be returned upon demand. All rights of design and invention are reserved by Advanced Support Products.

Patents #5816554 ; #6229497; #6427965; #6448497; #6578827 © 2010